

SOT-23 Plastic-Encapsulate Transistors

MMBTA42LT1

TRANSISTOR (NPN)

FEATURES

Power dissipation

$$P_{CM} : 0.3 \text{ W (Tamb=25}^\circ\text{C)}$$

Collector current


$$I_{CM} : 0.3 \text{ A}$$

Collector-base voltage

$$V_{(BR)CBO} : 300 \text{ V}$$

Operating and storage junction temperature range

$$T_J, T_{stg} : -55^\circ\text{C to } +150^\circ\text{C}$$

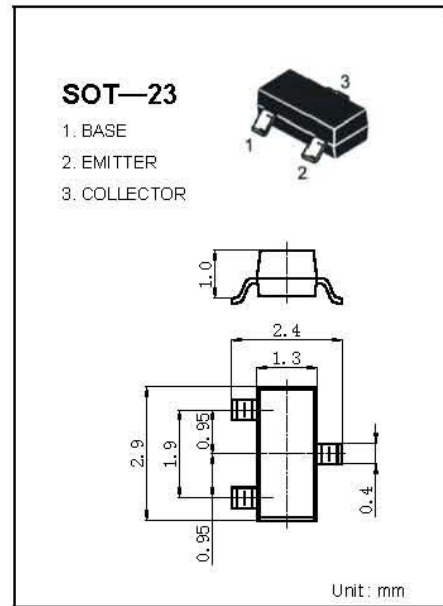

ELECTRICAL CHARACTERISTICS (Tamb=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = 100 \mu\text{A}, I_E = 0$	310		V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = 1 \text{mA}, I_B = 0$	305		V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = 100 \mu\text{A}, I_C = 0$	5		V
Collector cut-off current	I_{CBO}	$V_{CB} = 200 \text{V}, I_E = 0$		0.25	μA
Emitter cut-off current	I_{EBO}	$V_{EB} = 5 \text{V}, I_C = 0$		0.1	μA
DC current gain	$H_{FE(1)}$	$V_{CE} = 10 \text{V}, I_C = 1 \text{mA}$	60		
	$H_{FE(2)}$	$V_{CE} = 10 \text{V}, I_C = 10 \text{mA}$	100	200	
	$H_{FE(3)}$	$V_{CE} = 10 \text{V}, I_C = 30 \text{mA}$	60		
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = 20 \text{mA}, I_B = 2 \text{mA}$		0.2	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C = 20 \text{mA}, I_B = 2 \text{mA}$		0.9	V
Transition frequency	f_T	$V_{CE} = 20 \text{V}, I_C = 10 \text{mA}$ $f = 30 \text{MHz}$	50		MHz


DEVICE MARKING

MMBTA42LT1=1D


Typical Characteristics

MMBTA42LTI


DC Current Gain vs Collector Current

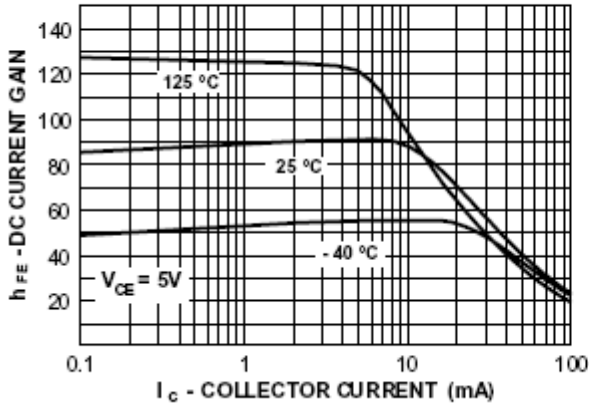


Collector-Emitter Saturation Voltage vs Collector Current

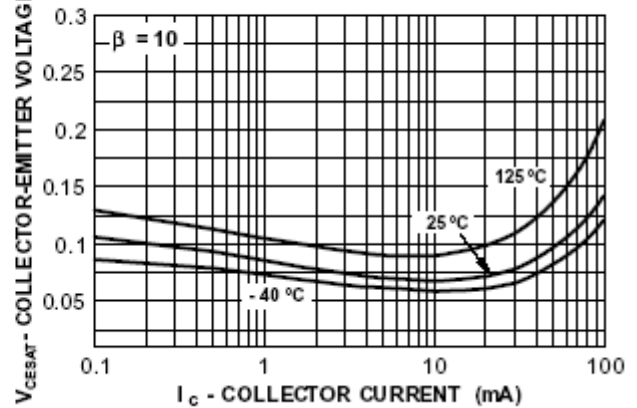


Base-Emitter Saturation Voltage vs Collector Current

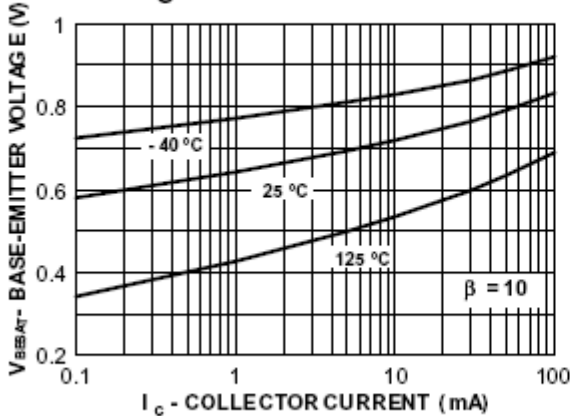


Base-Emitter ON Voltage vs Collector Current

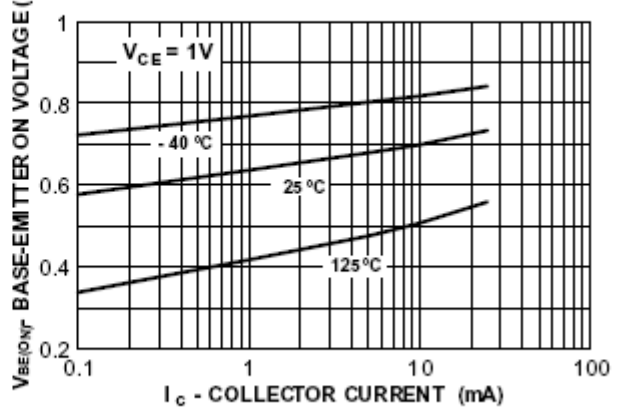

Collector-Cutoff Current vs Ambient Temperature

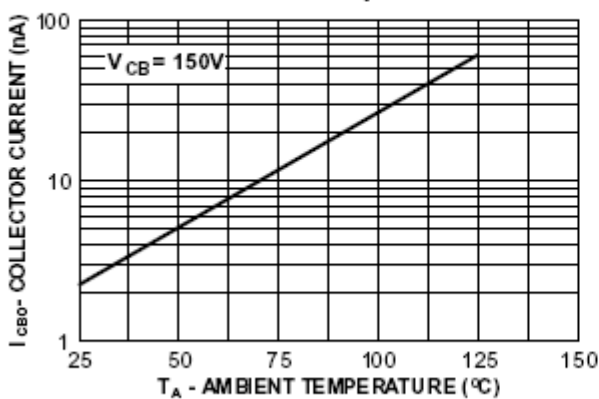

Collector-Base and Emitter-Base Capacitance vs Reverse Bias Voltage

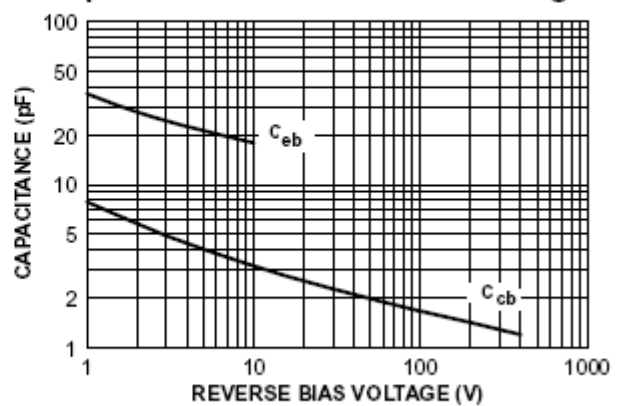

Power Dissipation vs Ambient Temperature

